


3.5 MOTORES SUMERGIBLES DE 12" DE 4 POLOS (1750 1/min)



**IMAGEN
Y
DIMENSIONES**

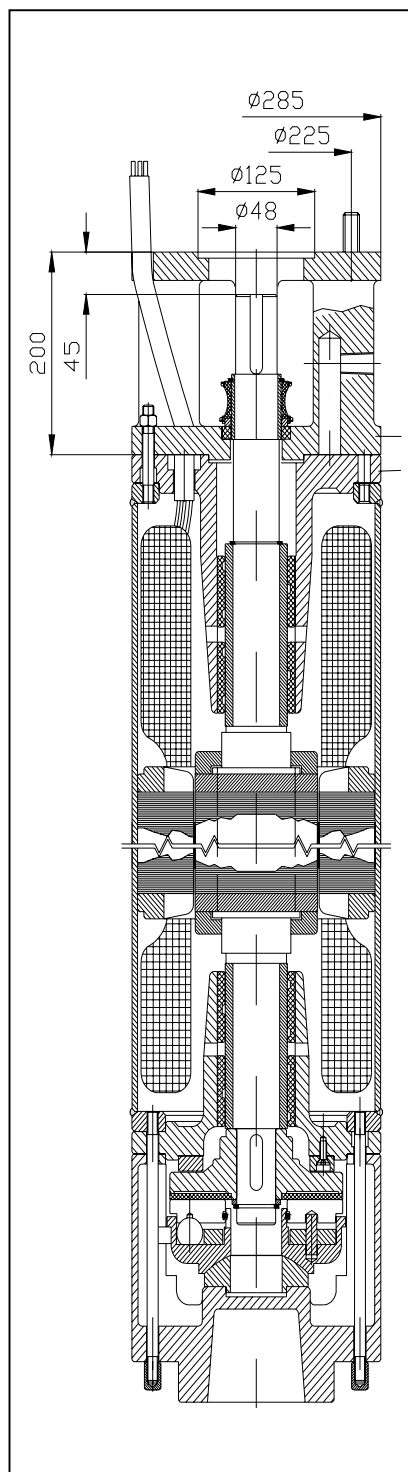

TABLAS TÉCNICAS - MOTORES DE 12"

4 POLOS – 60 Hz – 440 VOLTS											
MODELO	POTENCIA [HP / KW]	VEL. [1/min]	DIAM. EXTERIOR		LARGO [mm]	PESO [kg]	AMP. 440 V. [A]	FACTOR COS ϕ		EFICIENCIA [%]	
			[mm]	["]				75 %	100 %	75 %	100 %
SUM 12-115-4	115/86	1755	285	11.3	1749	465	150	0.82	0.86	86	87
SUM 12-150-4	150/112	1755	285	11.3	1849	505	194	0.82	0.86	87	88
SUM 12-170-4	170/127	1750	285	11.3	1979	555	215	0.85	0.88	88	88
SUM 12-190-4	190/142	1755	285	11.3	2049	585	246	0.83	0.86	88	88
SUM 12-230-4	230/172	1755	285	11.3	2249	665	297	0.82	0.86	88	88
SUM 12-250-4	250/186	1755	285	11.3	2399	730	323	0.82	0.85	89	89
4 POLOS – 60 Hz – 460 VOLTS											
	[HP / KW]	[1/min]	[mm]	["]	[mm]	[kg]	460 V. [A]	75 %	100 %	75 %	100 %
SUM 12-115-4	115/86	1755	285	11.3	1749	465	144	0.82	0.86	86	87
SUM 12-150-4	150/112	1755	285	11.3	1849	505	186	0.82	0.86	87	88
SUM 12-170-4	170/127	1750	285	11.3	1979	555	206	0.85	0.88	88	88
SUM 12-190-4	190/142	1755	285	11.3	2049	585	235	0.83	0.86	88	88
SUM 12-230-4	230/172	1755	285	11.3	2249	665	284	0.82	0.86	88	88
SUM 12-250-4	250/186	1755	285	11.3	2399	730	309	0.82	0.85	89	89
4 POLOS – 50 Hz – 380 VOLTS											
	[HP / KW]	[1/min]	[mm]	["]	[mm]	[kg]	380 V. [A]	75 %	100 %	75 %	100 %
SUM 12-115-4	115/86	1463	285	11.3	1749	465	145	0.82	0.86	86	87
SUM 12-150-4	150/112	1463	285	11.3	1849	505	187	0.82	0.86	87	88
SUM 12-170-4	170/127	1458	285	11.3	1979	555	207	0.85	0.88	88	88
SUM 12-190-4	190/142	1463	285	11.3	2049	585	237	0.83	0.86	88	88
SUM 12-230-4	230/172	1463	285	11.3	2249	665	287	0.82	0.86	88	88
SUM 12-250-4	250/186	1463	285	11.3	2399	730	312	0.82	0.85	89	89